


UKEF160 V

Compact single outlet with cable outlet



Consisting of floor box inclusive square single outlet and shuttering formwork, as concealed shuttering for direct installation in floor screed. As height-adjustable cassette installation frame with cable outlet cassette, welt, automatic-closure opening lever, floor-level cable outlet and rubber seal to accommodate up to two 45x45mm installed devices. With perforations on the side panels for the introduction of tubes M25. Suitable for rooms with dry and damp-cleaned floor covers. Designed for office traffic loads.

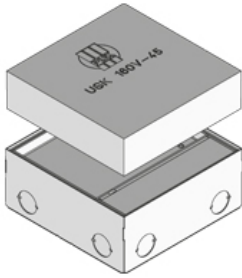

norm	according to DIN EN 50085
permits	according to VDE / TÜV

Product	H	H _{min}	N	B	L	E	T	P _{max}	IP _n	IP _g	G
UKEF160 15-V E	15 mm	70 mm	+20 mm	160 mm	160 mm	166 x 166 mm	12 mm	2 kN	IP 30	IP 20	2.05 kg

H : height

H_{min} : Minimum installation height

N : levelling range

B : width

L : length

E : fitting dimension

T : depth

P_{max} : Maximum load


IP_n : IP protection level in unused condition

IP_g : IP protection level in used condition

G : weight

DETAILS / APPLICATIONS



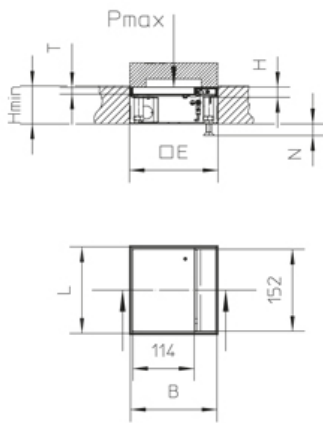

OPTIONAL ACCESSORIES

UKENP 160



dry-cleaned

